

# XFK-0901-4WH

#### 1:4 SMT TRANSFORMER

**RoHS Compliant and Pb-Free Product** Package: S01

#### **Features**

- Frequency Range: 8MHz to 900MHz Industry Standard SMT package
- Impedance Ratio: 1:4 Unbalanced to Available in Tape-and-Reel Balanced
- Low Cost and RoHS Compliant

- 50Ω Nominal Impedance




### **Product Description**


The XFK-0901-4WH transformer is designed for applications that require small, low cost, and highly reliable surface mount components. Applications may be found in broadband, wireless, and other communications systems. These units are built Lead-Free and RoHS Compliant. S-Parameters are available on request.


#### **Specifications**

Parameter	Specification			Unit
	Min.	Тур.	Max.	Offic
Frequency Range	8		900	MHz
Insertion Loss <1dB				MHz
Insertion Loss <2dB	8		900	MHz
Insertion Loss <3dB				MHz
Impedance Ratio	1:4			
Туре	Unbalanced to Balanced			

#### **Schematic**




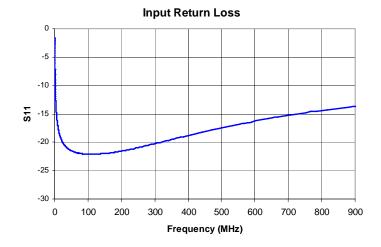




# XFK-0901-4WH








Pin Out

Pin	Name		
1	Secondary DOT		
2	Secondary CT		
3	Secondary		
4	Primary DOT		
5	Primary		

## Absolute Maximum Ratings

Parameter	Rating	Unit
RF Power	+33	dBm
Operating Temperature	-55 to +100	°C
Storage Temperature	-55 to +100	°C

### Package Drawing - S01



Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

RoHS status based on EU Directive 2002/95/EC (at time of this document revision).

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by MiniRF, Inc. ("MiniRF") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of MiniRF. MiniRF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.